
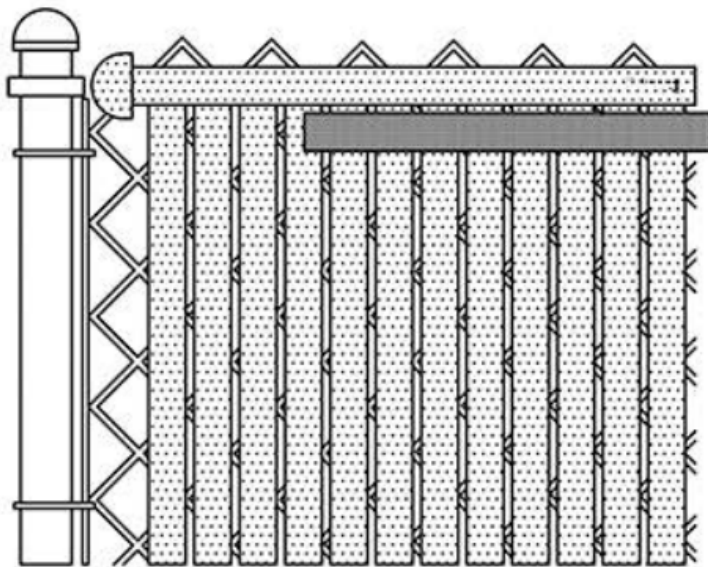


Top Locking Slat Installation Instructions

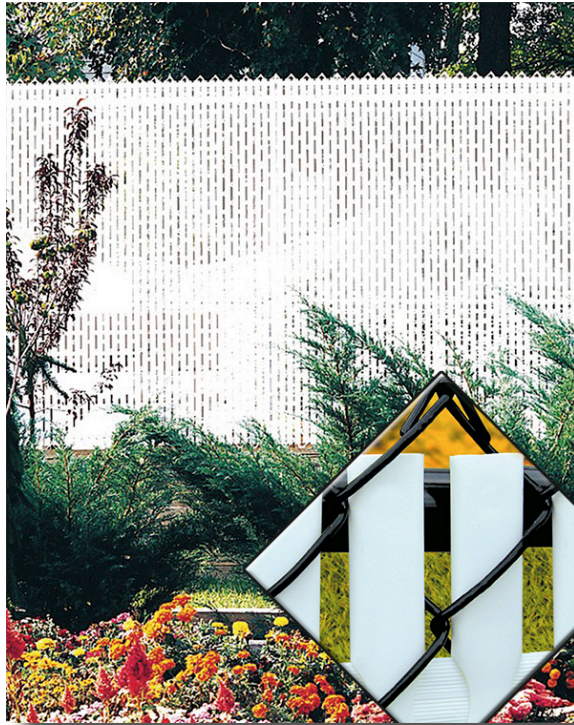

These holes are elliptical in shape to ensure they always stay open for fast and easy threading.

Insert the slats vertically from top to bottom, **keeping the locking holes on top.**

Thread the flexible locking channel horizontally through the notched holes in the slats.