

FINLINK[®] (EXTRA PRIVACY) FENCE SLATS



Specifications

Design: Our unique innovative design includes a rigid, flat tubular body, with “legs” inside for extra support. Three flexible fins (two on one side and one on the other) are positioned on the side of the slat body. The FinLink fins are not serrated, thus providing a smooth finished look.

Standard Heights: 4, 5, 6, 7, and 8 feet.

Slat Length: 3½" shorter than the overall height of fence.

Bottom Locking Channel: 10 feet provided in each bag.

Wind Load & Privacy Factor:
Approximately 90%



SLAT PROFILE:



COLORS:*

The FinLink[®] Slat offers extra screening and security with a unique configuration of (3) three privacy fins.

FinLink provides a quality-looking installation and is used together with our proprietary bottom channel. This process ensures that all slats are even in the wire and will not slip to the ground.

Black

White

Gray

Beige

Brown

Redwood

Green

Royal Blue

Light Blue

FINLINK® SLATS (EXTRA-PRIVACY)

SLAT TYPE	SLAT WIDTH	MESH SIZE	WIRE GAUGE	SLATS PER BAG	APPROX. COVERAGE PER BOX
FinLink®	1⅜"	2"	11, 11½, or 12	82	10 linear feet

QUALITY MATERIALS

The FinLink product is extruded from High Density Polyethylene (HDPE), color pigments, and ultra violet (UV) inhibitors, specifically designed to retard the harmful effects of the sun and lengthen the life of the product.

HIGH DURABILITY


Pexco PDS® HDPE Fence Products are resistant to severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

EASY MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.



INSTALLATION INSTRUCTIONS

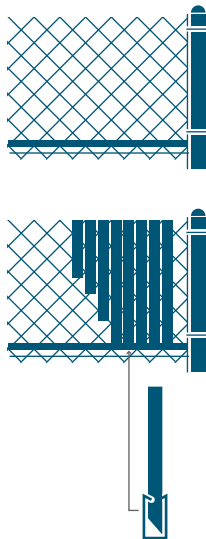

STEP 1: Insert rail horizontally in first full diamond at the bottom of the fence with the open side facing up.

STEP 2: Insert vertical slats with bevel end downward.

STEP 3: Push the vertical slat into the horizontal channel.

NOTE: These are friction-fitting Fence Slats. Additional time should be allowed for installation.

HDPE TECHNICAL PROPERTIES

Melt Index

(.35) Optimum extrusion processing conditions for Fence Slats

Density

(.945) Polyethylene ranges anywhere from .914 to .960 in density

Minimum Temp.

(-70°) Under no stress, HDPE remains flexible at this temperature

Maximum Temp.

(180°) Under no stress, HDPE will not distort at this temperature

Tensile Strength

(4,000 psi) HDPE will not distort at lesser loads or impacts

* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.

Covered by one or more of the following patents: US Patent **6,068,243 / 5,165,664 / 5,234,199**

** FinLink carries a 25-year, pro-rata warranty against breakage under normal conditions. Write Pexco for full warranty information.

Wind Load Disclaimer: Pexco will not be responsible for damage due to wind load conditions resulting from insufficient structural support.